

# CV 1650



## FROZEN RUN



Modular ice maker - Vertical evaporator system  
Daily production up to 780 kg

### • Position n°




### • Application fields

Hotel	●●●●●●●●	Fish market	●●●●●●●●
Restaurant	●●●●●●●●	Supermarket	●●●●●●●●
Fast food	●●●●●●●●	SPA	●●●●●●●●
Bar	●●●●●●●●	Medical	●●●●●●●●
Disco	●●●●●●●●	Industry	●●●●●●●●

### • Features & Plus

- Flat cube 7 gr crystalline and compact
- Our vertical evaporator provides separated cubes
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- Standard and special voltages
- ON-OFF switch
- Removable air filter for easy cleaning
- Washing system
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

### • Available dice size



### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	780
21° C	15° C	770
32° C	21° C	680

### • Usable Bins

- Bin T830

## 2 Years Warranty

subject to limitations

### • Certifications available for this model



[www.ntfice.it](http://www.ntfice.it)  
info@ntfice.it



ntfice.it




# CV 1650



## FROZEN RUN



Modular ice maker - Vertical evaporator system  
Daily production up to 780 kg

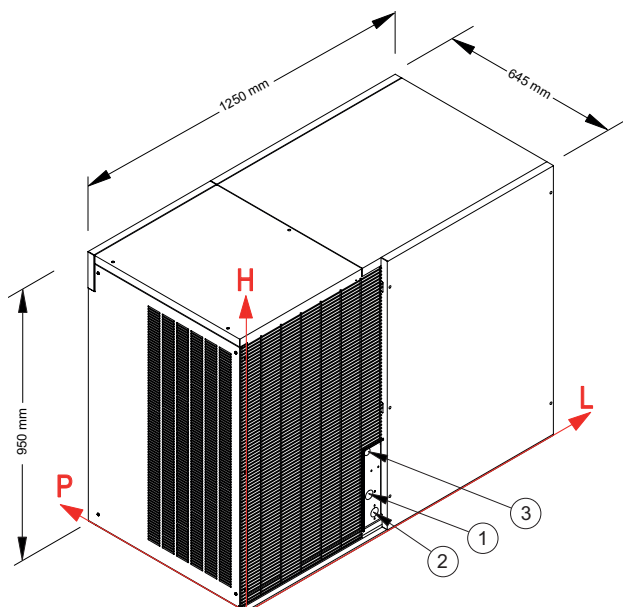

### ● Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
527 mm - 137 mm - 3/4"
- ② Water outlet:  
550 mm - 65 mm - 24 mm
- ③ Electrical connections:  
520 mm - 292 mm

### ● Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ● Technical information

Production in 24h	770 kg
Cooling system	A
Kind of cube	7 g
Refrigerant	R404A - R452A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	4300 W
Fuse	32 A
Water consumption	1,4 l/kg
Sizes (L-P-H mm)	1250 - 645 - 950
Sizes with pack (L-P-H mm)	1350 - 745 - 1150
Net weight	186 kg
Gross weight	242 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



Standard  
Cube (7 g)



Ambient  
temperature  
+21° C



Water  
temperature  
+15° C



Electrical  
consumption  
at +43° C  
(standard  
voltage)

Models and specifications are subject to change without notice  
Rev. 02 - Issued September 2019



[www.ntfice.it](http://www.ntfice.it)  
[info@ntfice.it](mailto:info@ntfice.it)



[ntfice.it](http://ntfice.it)

