

# SL 180



## FROZEN DICE



Self-contained ice maker - Sprayer system  
Daily production up to 98 kg

### • Position n°




### • Application fields

|            |            |             |            |
|------------|------------|-------------|------------|
| Hotel      | ●●●●●●●●●● | Fish market | ●●●●●●●●●● |
| Restaurant | ●●●●●●●●●● | Supermarket | ●●●●●●●●●● |
| Fast food  | ●●●●●●●●●● | SPA         | ●●●●●●●●●● |
| Bar        | ●●●●●●●●●● | Medical     | ●●●●●●●●●● |
| Disco      | ●●●●●●●●●● | Industry    | ●●●●●●●●●● |

### • Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet

### • Available dice size

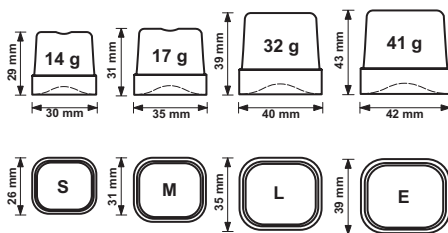

### • Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C     | 10° C       | 98           |
| 21° C     | 15° C       | 88           |
| 32° C     | 21° C       | 75           |

## 2 Years Warranty

subject to limitations

### • Certifications available for this model



www.ntfice.it  
info@bremaicegroup.it



ntfice.it




# SL 180



## FROZEN DICE



Self-contained ice maker - Sprayer system  
Daily production up to 98 kg

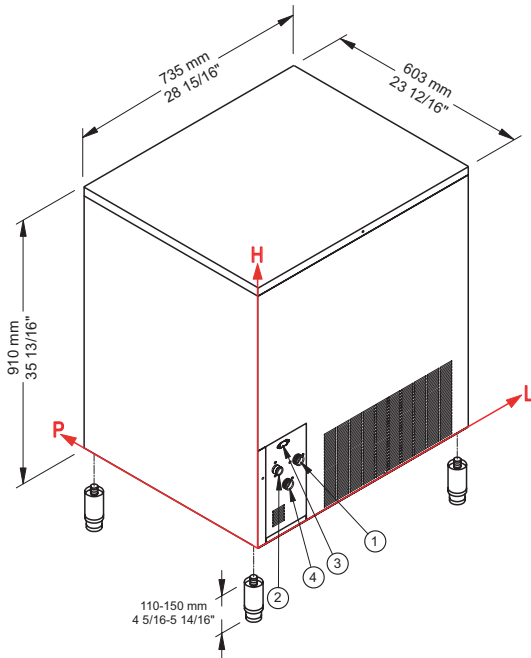

### • Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
135 mm - 237 mm - 3/4"
- ② Water outlet:  
62 mm - 242 mm - 24 mm
- ③ Electrical connection:  
100 mm - 312 mm
- ④ Condenser water inlet (only W):  
98 mm - 177 mm - 3/4"

### • Working conditions






- Location: Indoor

|                      | Min           | Max           |
|----------------------|---------------|---------------|
| Ambient temperature  | +10° C        | +43° C        |
| Water temperature    | +3° C         | +32° C        |
| Voltage              | -10%          | +10%          |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

### • Technical information

|                            |  |
|----------------------------|--|
| Production in 24h          | 88 kg                                  |
| Store capacity, up to      | 40 kg                                  |
| Cooling system             | A - W                                  |
| Kind of cube               | 14-17-32-41 g                          |
| Refrigerant                | R452A                                  |
| Standard voltage           | 220-240 V ~ 50 Hz                      |
| Electrical consumption     | 890 W                                  |
| Fuse                       | 10 A                                   |
| Water consumption          | A: 2,5 l/kg<br>W: 14,2 l/kg            |
| Sizes (L-P-H mm)           | 735 - 603 - 910                        |
| Sizes with pack (L-P-H mm) | 780 - 640 - 1085                       |
| Net weight                 | 71 kg                                  |
| Gross weight               | 83 kg                                  |
| Finish                     | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| Sizes without feet  | Standard Cube (17 g)  | Ambient temperature +21° C  | Water temperature +15° C  | Electrical consumption at +43° C (standard voltage)                                   |

Models and specifications are subject to change without notice  
Rev. 03 - Issued September 2020



[www.ntfice.it](http://www.ntfice.it)  
[info@bremoicegroup.it](mailto:info@bremoicegroup.it)



ntfice.it

