

SL 50



FROZEN DICE

Self-contained ice maker - Sprayer system
Daily production up to 32 kg

• Position n°




• Application fields

| | | | |
|------------|------------|-------------|------------|
| Hotel | ●●●●●●●●●● | Fish market | ●●●●●●●●●● |
| Restaurant | ●●●●●●●●●● | Supermarket | ●●●●●●●●●● |
| Fast food | ●●●●●●●●●● | SPA | ●●●●●●●●●● |
| Bar | ●●●●●●●●●● | Medical | ●●●●●●●●●● |
| Disco | ●●●●●●●●●● | Industry | ●●●●●●●●●● |

• Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Undercounter model

• Available dice size

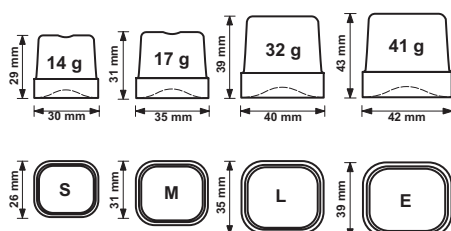

• Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C | 10° C | 32 |
| 21° C | 15° C | 28 |
| 32° C | 21° C | 22 |

2 Years Warranty

subject to limitations

• Certifications available for this model




SL 50



FROZEN DICE

Self-contained ice maker - Sprayer system
Daily production up to 32 kg

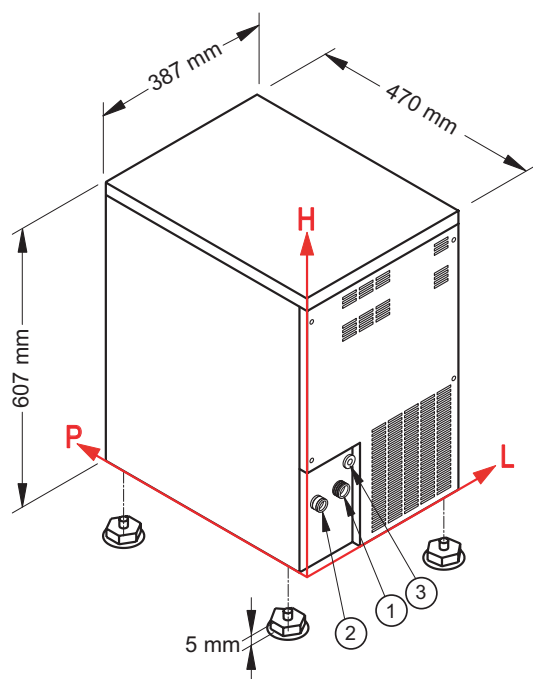

• Working conditions

- Location: Indoor

| | Min | Max |
|----------------------|---------------|---------------|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

• Technical information






| | |
|----------------------------|--|
| Production in 24h | 28 kg |
| Store capacity, up to | 6 kg |
| Cooling system | A - W |
| Kind of cube | 14-17-32-41 g |
| Refrigerant | R452A |
| Standard voltage | 220-240 V ~ 50 Hz |
| Electrical consumption | 270 W |
| Fuse | 10 A |
| Water consumption | A: 5,1 l/kg W: 14 l/kg |
| Sizes (L-P-H mm) | 387 - 470 - 607 |
| Sizes with pack (L-P-H mm) | 440 - 520 - 780 |
| Net weight | 31 kg |
| Gross weight | 37 kg |
| Finish | AISI 304 stainless steel, scotch brite |

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
130 mm - 145 mm - 3/4"
- ② Water outlet:
49 mm - 140 mm - 24mm
- ③ Electrical connection:
95 mm - 209 mm

All the technical information must be considered at the following conditions:

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| Sizes without feet | Standard Cube (17 g) | Ambient temperature +21° C | Water temperature +15° C | Electrical consumption at +43° C (standard voltage) |

Models and specifications are subject to change without notice
Rev. 03 - Issued July 2020

