

SL 60



FROZEN DICE

Self-contained ice maker - Sprayer system  
Daily production up to 36 kg

● Position n°




● Application fields

Hotel	●●●●●●●●●●	Fish market	●●●●●●●●●●
Restaurant	●●●●●●●●●●	Supermarket	●●●●●●●●●●
Fast food	●●●●●●●●●●	SPA	●●●●●●●●●●
Bar	●●●●●●●●●●	Medical	●●●●●●●●●●
Disco	●●●●●●●●●●	Industry	●●●●●●●●●●

● Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Undercounter model

● Available dice size

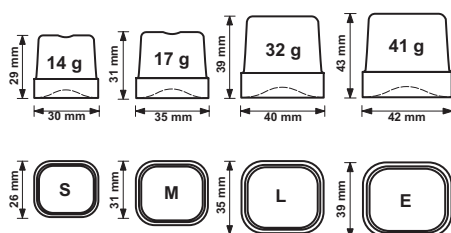

● Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	36
21° C	15° C	32
32° C	21° C	26

2 Years Warranty

subject to limitations

● Certifications available for this model




# SL 60



## FROZEN DICE

Self-contained ice maker - Sprayer system  
Daily production up to 36 kg

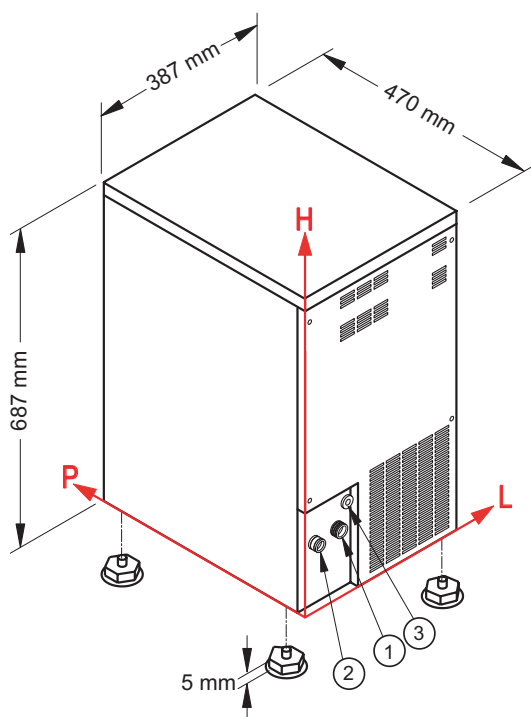

### • Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### • Technical information






Production in 24h	32 kg
Store capacity, up to	9 kg
Cooling system	A - W
Kind of cube	14-17-32-41 g
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	270 W
Fuse	10 A
Water consumption	A: 5,1 l/kg W: 16 l/kg
Sizes (L-P-H mm)	387 - 470 - 687
Sizes with pack (L-P-H mm)	440 - 520 - 860
Net weight	32,5 kg
Gross weight	39 kg
Finish	AISI 304 stainless steel, scotch brite

### • Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
130 mm - 145 mm - 3/4"
- ② Water outlet:  
49 mm - 140 mm - 24 mm
- ③ Electrical connection:  
95 mm - 209 mm

All the technical information must be considered at the following conditions:

				
Sizes without feet	Standard Cube (17 g)	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice  
Rev. 03 - Issued July 2020

